



Sporregatan 25 SE-21377 Malmö

Tel. 040-214120



RIGHT ANGLE TRANSFER MODULE



info@litex.se www.litex.se





You could have unlimited motion control in a simple modular package?



FEATURES AND BENEFITS

- Can be easily integrated into existing traditional or motorized roller conveyor systems
- Ability to transfer a wide array of products
- Mechanical lift unneeded (only two means of motion required)
- Run smaller packages without "gaps" associated with pop-up transfer modules
- Ideal for handling polybags and smaller packages
- Utilizes unique System Plast 2253 Roller Top belt technology

- Zero contact, zero pressure accumulation
- Run on demand technology
- Low Noise & Low Voltage (24VDC, no conduit required)
- Energy Savings as high as 50%-60% as compared to traditional conveyors
- Easy maintenance through minimum spare parts requirements
- High resolution package control



THE 2253RT BASED TRANSFER MARRIES EXISTING TECHNOLOGY

SYSTEM PLAST 2253RT ROLLER TOP BELT

- Unique ability to transfer & divert packages based on the spheres' vector speed and direction
- 1" sphere centers allow for very small packages to be diverted

MOTORIZED DRIVE ROLLER AND CONTROLS

- Run on demand technology
- Energy efficient, quiet, low maintenance



Gaps, safety hazard




Near continuum surface. Spheres on 1" (25mm) Centers




Rollers, Fasteners Belts

Large Gaps 3" (75mm) Centers

VS

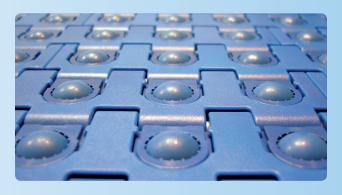

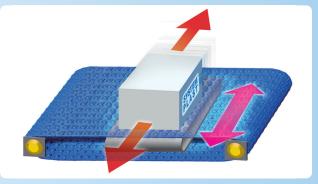


Lateral movement


MODSORT PRODUCT RANGE

A modular transfer/divert station based on proven technologies, offered in a wide range of sizes to fit your application.

MODSORT TRANSFER SIZES				
Size	Length mm	Width mm	Available Take Away Widths, mm	Effective Zone Length, mm
1	762	406	406, 55 9	609
2	762	55 9	55 9	609
3	914	406	406, 55 9 , 711	762
4	914	55 9	55 9 , 711	762
5	914	711	711	762
6	1067	55 9	55 9 , 711 , 863	914
7	1067	711	711, 863	914
8	1067	863	863	914

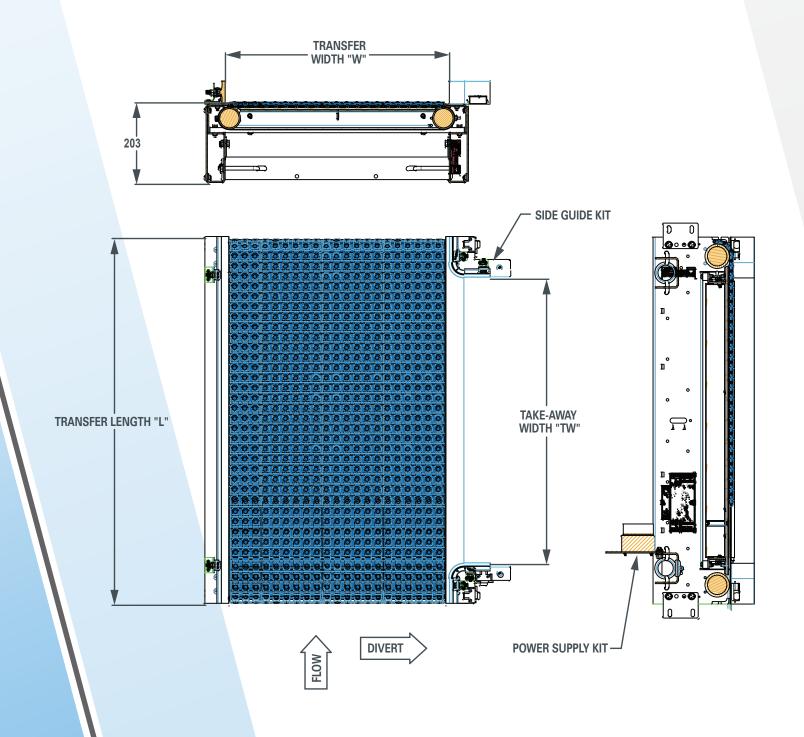


APPLICATION VERSATILITY

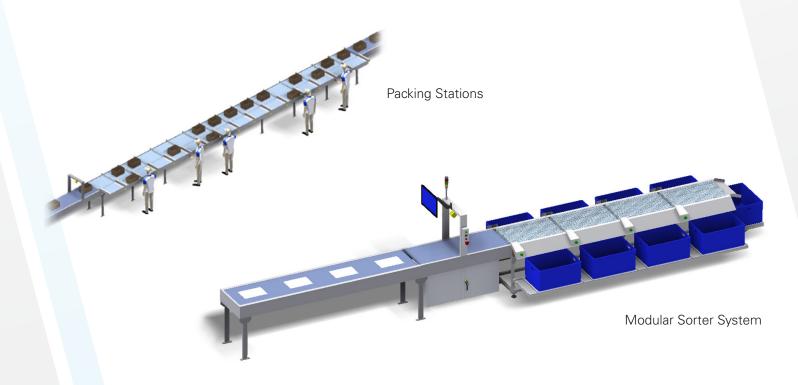





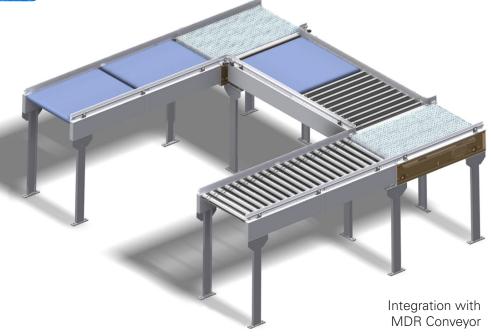







Lifecycle









Contact your Regal™ representative to discuss our Lifecycle Services program and how you can leverage it to maximize your equipment investment.



Regal™ Power Transmission Solutions 7120 New Buffington Road

Florence, KY 41042

Customer Service: 800-626-2120 Fax: 800-262-3292

Technical Service: 800-626-2093

LITEX AB

Sporregatan 25 SE-21377 Malmö Tel. 040-214120 info@litex.se www.litex.se

www.RegalPTS.com/MatlHandling

APPLICATION CONSIDERATIONS

The proper selection and application of power transmission products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and its affiliates with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, Disclaimers of Warranty, Limitation of Liability and Remedy, please contact Customer Service at 1-800-626-2120. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal Beloit America Inc. product referred to herein, including any person who buys from a licensed distributor of these branded products.

